

+44 (0) 161 928 6221 info@hydratron.co.uk

TECHNICAL DATA SHEET

PRODUCT	HPU-LW-1-36H-N*-L**/options
SERIES	HPU-LW-1 Single Acting Air operated, hydraulic power pack for pressure
	testing, chemical injection and hydraulic power.



FEATURES

- Infinitely variable output pressure and flow
- Holds static pressure without generating heat or consuming power
- Standard models are suitable for oil or water applications
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction

PERFORMANCE DATA

Max Rated Output Pressure	3,625psi (250bar)	
Output Per Cycle	0.77 in³ (13cc)	
Max Flow	366 in³/min (6 litre/min)	
Max Air Supply Pressure	100psi (7bar)	
Ratio	36 : 1	
Air Consumption	28 scfm (800 NI/min)	
Tank Capacity	1.65 Gallons (7.5 litres)	

SEAL OPTIONS (N*)

N* (standard)	Nitrile (Buna-N) Main Seal and Check Valve Seals
V	Viton (FKM) Main Seal and Check Valve Seals
С	Chemraz (FFKM) Main Seal and Check Valve Seals







Pag. 2 of 3

CONSTRUCTION

Frame and Tank	Stainless Steel Frame & Plastic Tank
Air Motor	Anodised Aluminium / Wound Composite / Nitrile (Buna-N) Seals
Hydraulic Cylinder	Stainless Steel
Piston	Stainless Steel + Chrome Finish
Outlet Port	Stainless Steel
L1** (standard)	Nylon / Copper / Brass, Hydraulic / Air Inlet and Plated Steel Silencer
L2** (optional)	Stainless Steel, Hydraulic / Air Inlet and Silencer

CONNECTIONS


Hydraulic Outlet	1/2" NPT(F)
Air Inlet	3/8" BSPP(F)
Net Weight	19kg (42lb)

COMMON OPTIONS (BUT NOT LIMITED TO)

/ A	ATEX (94/9/EC) II 2GD c T5
/ Q	No tank-direct fluid inlet via Y type stainless steel strainer
/ V	No tank-direct hydraulic inlet via Y type brass strainer

GENERAL LAYOUT DRAWING

Model: HPU-LW-1-36H

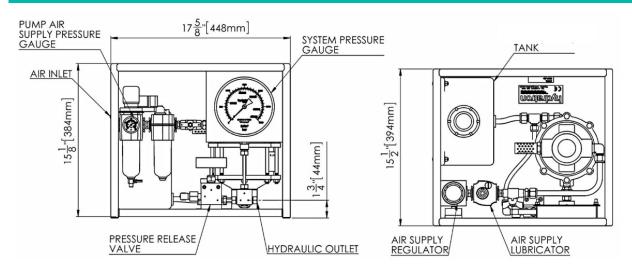





Pag. 3 of 3

HYDRAULIC PRESSURE STATIC / STALL CONDITIONS			
AIR PRESSURE	HYDRAULIC PRESSURE		
20psi (1.4bar)	600psi (41bar)		
40psi (2.8bar)	1,400psi (96bar)		
60psi (4bar)	2,125psi (147bar)		
80psi (5.5bar)	2,825psi (195bar)		
100psi (7bar)	3,625psi (250bar)		

FLOW CURVE

AZ-1-36 - Ratio 36:1

