

+44 (0) 161 928 6221 info@hydratron.co.uk

## **TECHNICAL DATA SHEET**

PRODUCT	HPU-LW-2-180H-N*-L**/options
SERIES	HPU-LW-2 Single Acting
	Air operated, hydraulic power pack for pressure testing, chemical injection and hydraulic power.



## **FEATURES**

- Infinitely variable output pressure and flow
- Holds static pressure without generating heat or consuming power
- Standard models are suitable for oil or water applications
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction

## **PERFORMANCE DATA**

Max Rated Output Pressure	18,000psi (1,241bar)	
Output Per Cycle	0.491 in³ (8.05cc)	
Max Flow	128 in³/min (2.1 litre/min)	
Max Air Supply Pressure	100psi (7bar)	
Ratio	180 : 1	
Air Consumption	56 scfm (1,586 NI/min)	
Tank Capacity	1.65 Gallons (7.5 litres)	

## SEAL OPTIONS (N\*)

N* (standard)	Nitrile (Buna-N) Main Seal and Check Valve Seals
V	Viton (FKM) Main Seal and Check Valve Seals
С	Chemraz (FFKM) Main Seal and Check Valve Seals (Max Rated Output Pressure 15,000psi-1,035bar)







**Technical Data Sheet** 

Pag. 2 of 3

## CONSTRUCTION

Frame and Tank	Stainless Steel Frame & Plastic Tank
Air Motor	Anodised Aluminium / Wound Composite / Nitrile (Buna-N) Seals
	Anouised Aluminium / Wound Composite / Nitrile (Buna-N) Seals
Hydraulic Cylinder	Stainless Steel
Piston	Stainless Steel + Chrome Finish
Outlet Port	Stainless Steel
L1** (standard)	Nylon / Copper / Brass, Hydraulic / Air Inlet & Plated Steel Silencer
L2** (optional)	Stainless Steel, Hydraulic / Air Inlet & Silencer

## CONNECTIONS


Hydraulic Outlet	3/8" MP(F)
Air Inlet	1/2" BSPP(F)
Net Weight	24kg (53lb)

## COMMON OPTIONS (BUT NOT LIMITED TO)

/ A	ATEX (94/9/EC) II 2GD c T5
/ Q	No tank-direct fluid inlet via Y type stainless steel strainer
/ V	No tank-direct hydraulic inlet via Y type brass strainer

## **GENERAL LAYOUT DRAWING**

## Model: HPU-LW-2-180H

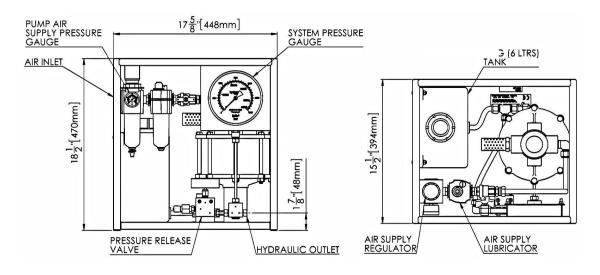



# 

Pag. 3 of 3

## HYDRAULIC PRESSURE STATIC / STALL CONDITIONS

AIR PRESSURE	HYDRAULIC PRESSURE
20psi (1.4bar)	3,200psi (221bar)
40psi (2.8bar)	7,100psi (490bar)
60psi (4bar)	10,800psi (745bar)
80psi (5.5bar)	14,500psi (1,000bar)
100psi (7bar)	18,000psi (1,241bar)

## **FLOW CURVE**

AZ-2-180 - Ratio 180:1

