

+44 (0) 161 928 6221 info@hydratron.co.uk

TECHNICAL DATA SHEET

PRODUCT	HYPS-AZ-1-30H-N*/**options
SERIES	HYPS-AZ-1 Single Acting
	Air operated, hydraulic power pack for pressure testing, chemical injection and hydraulic power.



FEATURES

- Infinitely variable output pressure and flow
- Holds static pressure without generating heat or consuming power
- Standard models are suitable for oil or water applications
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing

Basic Models are ATEX Certified in accordance with 2014/34/EU. *Note: addition of options may affect ATEX rating.*

PERFORMANCE DATA

Max Rated Output Pressure	3,075psi (212bar)	
Output Per Cycle	0.86 in³ (14cc)	
Max Flow	445 in ³ /min (7.3 litre/min)	
Max Air Supply Pressure	100psi (7bar)	
Ratio	30 : 1	
Air Consumption	28 scfm (800 NI/min)	
Tank Capacity	2.5 Gallons (11.4 litres)	

SEAL OPTIONS (N*)

N*	(Standard) Nitrile (Buna-N) Main Seal and Check Valve Seals
V	Viton (FKM) Main Seal and Check Valve Seals
С	Chemraz (FFKM) Main Seal and Check Valve Seals

HYDRATRON LIMITED | A PRYME GROUP COMPANY





Pag. 2 of 3

CONSTRUCTION

Frame and Tank	Stainless Steel
Air Motor	Anodised Aluminium / Wound Composite / Nitrile (Buna-N)
Hydraulic Cylinder	Stainless Steel
Piston	Stainless Steel + Chrome Finish
Outlet Port	Stainless Steel

CONNECTIONS

Hydraulic Outlet	1/2" NPT(F)
Air Inlet	1/2" BSPP(F)
Net Weight	25kg (55lb)

COMMON OPTIONS (BUT NOT LIMITED TO)


/ D	External fluid supply via bulkhead (no tank fitted)
/ T	Stainless steel tank fitted
/ Tx	Stainless steel tank fitted with external fluid supply port
/ F	Panel mount digital stroke counter (non ATEX)
/ G	Panel mount pneumatic stroke counter
/1	Test isolation valve fitted
/0	Single pen chart recorder complete with recorder isolation valve
/ W	Fitted with wheels
/ R	Relief valve fitted and set in test line





Pag. 3 of 3

GENERAL LAYOUT DRAWING

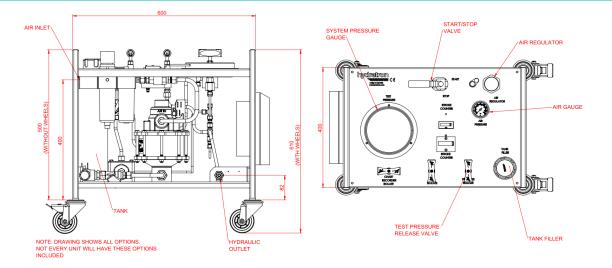


HYDRAULIC PRESSURE STATIC / STALL CONDITIONS

AIR PRESSURE	HYDRAULIC PRESSURE
20psi (1.4bar)	525psi (36bar)
40psi (2.8bar)	1,150psi (79bar)
60psi (4bar)	1,775psi (122bar)
80psi (5.5bar)	2,350psi (162bar)
100psi (7bar)	3,075psi (212bar)

FLOW CURVE

AZ-1-30 - Ratio 30:1

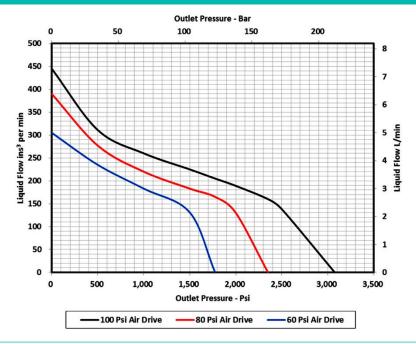

HYDRATRON LIMITED | A PRYME GROUP COMPANY

