

+44 (0) 161 928 6221 info@hydratron.co.uk

# **TECHNICAL DATA SHEET**

PRODUCT	HYPS-AZ-2-21H-N*/**options
SERIES	HYPS-AZ-2 Single Acting  Air operated, hydraulic power pack for pressure testing, chemical injection and hydraulic power.



#### **FEATURES**

- Infinitely variable output pressure and flow
- · Holds static pressure without generating heat or consuming power
- Standard models are suitable for oil or water applications
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing

Basic Models are ATEX Certified in accordance with 2014/34/EU. *Note: addition of options may affect ATEX rating.* 

## PERFORMANCE DATA

Max Rated Output Pressure	2,150psi (148bar)
Output Per Cycle	4.06 in³ (66.5cc)
Max Flow	976 in³/min (16 litre/min)
Max Air Supply Pressure	100psi (7bar)
Ratio	21 : 1
Air Consumption	56 scfm (1,586 NI/min)
Tank Capacity	2.5 Gallons (11.4 litres)

## **SEAL OPTIONS (N\*)**

N*	(Standard) Nitrile (Buna-N) Main Seal and Check Valve Seals
V	Viton (FKM) Main Seal and Check Valve Seals
С	Chemraz (FFKM) Main Seal and Check Valve Seals





Pag. 2 of 3

$\mathbf{c}$	NICT	гог	СТ	ION
CO	IVO	KU		IUN

Frame and Tank	Stainless Steel
Air Motor	Anodised Aluminium / Wound Composite / Nitrile (Buna-N)
Hydraulic Cylinder	Stainless Steel
Piston	Stainless Steel + Chrome Finish
Outlet Port	Stainless Steel

#### **CONNECTIONS**


Hydraulic Outlet	1/2" NPT(F)
Air Inlet	1/2" BSPP(F)
Net Weight	30kg (66lb)

## **COMMON OPTIONS (BUT NOT LIMITED TO)**

/ D	External fluid supply via bulkhead (no tank fitted)
/ T	Stainless steel tank fitted
/ Tx	Stainless steel tank fitted with external fluid supply port
/ F	Panel mount digital stroke counter (non ATEX)
/ G	Panel mount pneumatic stroke counter
/1	Test isolation valve fitted
/0	Single pen chart recorder complete with recorder isolation valve
/ W	Fitted with wheels
/ R	Relief valve fitted and set in test line



## **GENERAL LAYOUT DRAWING**

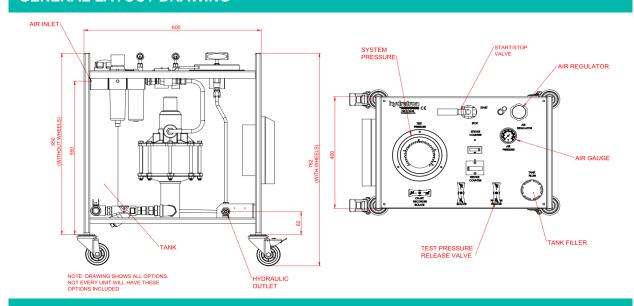

## **HYDRAULIC PRESSURE STATIC / STALL CONDITIONS**

AIR PRESSURE	HYDRAULIC PRESSURE
20psi (1.4bar)	425psi (29.3bar)
40psi (2.8bar)	875psi (60.3bar)
60psi (4bar)	1,300psi (89.7bar)
80psi (5.5bar)	1,750psi (121bar)
100psi (7bar)	2,150psi (148bar)

## FLOW CURVE AZ-2-21 - Ratio 21:1

