+44 (0) 161 928 6221 info@hydratron.co.uk

TECHNICAL DATA SHEET

PRODUCT HYPS-AZ-2-97H-N*/**options

SERIES HYPS-AZ-2 Single Acting

Air operated, hydraulic power pack for pressure testing, chemical injection and hydraulic power.



FEATURES

- Infinitely variable output pressure and flow
- Holds static pressure without generating heat or consuming power
- Standard models are suitable for oil or water applications
- Well proven and trouble-free operation
- · Designed for ease of maintenance
- Low cost servicing

Basic Models are ATEX Certified in accordance with 2014/34/EU. *Note: addition of options may affect ATEX rating.*

PERFORMANCE DATA

Max Rated Output Pressure	9,700psi (669bar)
Output Per Cycle	0.928 in³ (15.2cc)
Max Flow	238 in³/min (3.9 litre/min)
Max Air Supply Pressure	100psi (7bar)
Ratio	97 : 1
Air Consumption	56 scfm (1,586 NI/min)
Tank Capacity	2.5 Gallons (11.4 litres)

SEAL OPTIONS (N*)

N*	(Standard) Nitrile (Buna-N) Main Seal and Check Valve Seals
V	Viton (FKM) Main Seal and Check Valve Seals
С	Chemraz (FFKM) Main Seal and Check Valve Seals







Pag. 2 of 3

CO	мет	ъΠ	CTI		П
CO	ΝЭΙ	KU	CII	UI	VI

Frame and Tank	Stainless Steel
Air Motor	Anodised Aluminium / Wound Composite / Nitrile (Buna-N)
Hydraulic Cylinder	Stainless Steel
Piston	Stainless Steel + Chrome Finish
Outlet Port	Stainless Steel

CONNECTIONS


Hydraulic Outlet	3/8" MP(F)
Air Inlet	1/2" BSPP(F)
Net Weight	30kg (66lb)

COMMON OPTIONS (BUT NOT LIMITED TO)

External fluid supply via bulkhead (no tank fitted) Stainless steel tank fitted Stainless steel tank fitted with external fluid supply port	
Stainless steel tank fitted with external fluid supply port	
5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Panel mount digital stroke counter (non ATEX)	
Panel mount pneumatic stroke counter	
Test isolation valve fitted	
Single pen chart recorder complete with recorder isolation	on valve
V Fitted with wheels	
Relief valve fitted and set in test line	

Pag. 3 of 3

GENERAL LAYOUT DRAWING

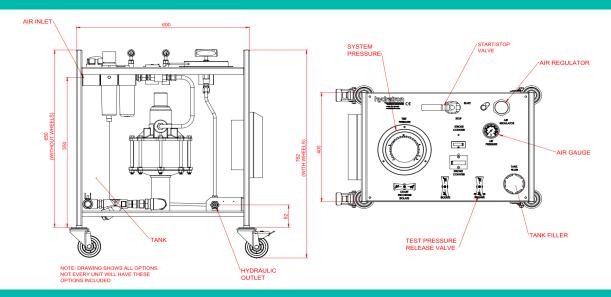

HYDRAULIC PRESSURE STATIC / STALL CONDITIONS

AIR PRESSURE	HYDRAULIC PRESSURE
20psi (1.4bar)	1,750psi (121bar)
40psi (2.8bar)	3,700psi (255bar)
60psi (4bar)	5,900psi (407bar)
80psi (5.5bar)	7,700psi (531bar)
100psi (7bar)	9,700psi (669bar)

FLOW CURVE AZ-2-97 - Ratio 97:1

