

TECHNICAL DATA SHEET

PRODUCT HPU-LW-1-10H-N*-L**/options

SERIES HPU-LW-1 Single Acting

Air operated, hydraulic power pack for pressure testing, chemical injection and hydraulic power.



FEATURES

- Infinitely variable output pressure and flow
- · Holds static pressure without generating heat or consuming power
- Standard models are suitable for oil or water applications
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction

PERFORMANCE DATA

Max Rated Output Pressure	1,000psi (70bar)
Output Per Cycle	2.58 in³ (42cc)
Max Flow	1,409 in ³ /min (23.1 litre/min)
Max Air Supply Pressure	100psi (7bar)
Ratio	10 : 1
Air Consumption	28 scfm (800 NI/min)
Tank Capacity	1.65 Gallons (7.5 litres)

SEAL OPTIONS (N*)

N* (standard)	Nitrile (Buna-N) Main Seal and Check Valve Seals
V	Viton (FKM) Main Seal and Check Valve Seals
С	Chemraz (FFKM) Main Seal and Check Valve Seals







COMMON OPTIONS (BUT NOT LIMITED TO)


CONSTRUCTION

Frame and Tank	Stainless Steel Frame & Plastic Tank
Air Motor	Anodised Aluminium / Wound Composite / Nitrile (Buna-N) Seals
Hydraulic Cylinder	Stainless Steel
Piston	Stainless Steel + Chrome Finish
Outlet Port	Stainless Steel
L1** (standard)	Nylon / Copper / Brass, Hydraulic / Air Inlet & Plated Steel Silencer
L2** (optional)	Stainless Steel, Hydraulic / Air Inlet & Silencer

Hydraulic Outlet 1/2" NPT(F) Air Inlet 3/8" BSPP(F) Net Weight 19kg (42lb)

/ A	ATEX - Zone 1 Category II
/ Q	No tank-direct fluid inlet via Y type stainless steel strainer
/ V	No tank-direct hydraulic inlet via Y type brass strainer

GENERAL LAYOUT DRAWING Model: HPU-LW-1-10H

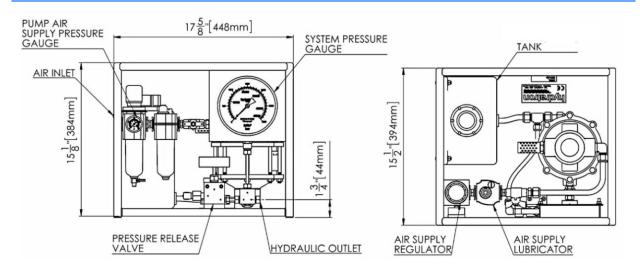

Pag. 3 of 3

HYDRAULIC PRESSURE STATIC / STALL CONDITIONS AIR PRESSURE HYDRAULIC PRESSURE 20psi (1.4bar) 180psi (12.4bar) 40psi (2.8bar) 385psi (26.6bar) 60psi (4bar) 590psi (40.7bar) 80psi (5.5bar) 795psi (54.8bar) 100psi (7bar) 1,000psi (70bar)

FLOW CURVE

HPU-LW-AZ-1-10 - Ratio 10:1

