

# **TECHNICAL DATA SHEET**

PRODUCT HPU-LW-2-97H-N\*-L\*\*/options

SERIES HPU-LW-2 Single Acting

Air operated, hydraulic power pack for pressure testing, chemical injection and hydraulic power.



### **FEATURES**

- Infinitely variable output pressure and flow
- · Holds static pressure without generating heat or consuming power
- Standard models are suitable for oil or water applications
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction

#### **PERFORMANCE DATA**

Max Rated Output Pressure	9,700psi (669bar)
Output Per Cycle	0.928 in³ (15.2cc)
Max Flow	238 in³/min (3.9 litre/min)
Max Air Supply Pressure	100psi (7bar)
Ratio	97 : 1
Air Consumption	56 scfm (1,586 NI/min)
Tank Capacity	1.65 Gallons (7.5 litres)

## **SEAL OPTIONS (N\*)**

N* (standard)	Nitrile (Buna-N) Main Seal and Check Valve Seals
V	Viton (FKM) Main Seal and Check Valve Seals
С	Chemraz (FFKM) Main Seal and Check Valve Seals





CONSTRUCTION		
Frame and Tank	Stainless Steel Frame & Plastic Tank	
Air Motor	Anodised Aluminium / Wound Composite / Nitrile (Buna-N) Seals	
Hydraulic Cylinder	Stainless Steel	
Piston	Stainless Steel + Chrome Finish	
Outlet Port	Stainless Steel	

## **CONNECTIONS**


Hydraulic Outlet	1/2" NPT(F)
Air Inlet	1/2" BSPP(F)
Net Weight	24kg (53lb)

# COMMON OPTIONS (BUT NOT LIMITED TO)

/ A	ATEX - Zone 1 Category II
/ Q	No tank-direct fluid inlet via Y type stainless steel strainer
/ V	No tank-direct hydraulic inlet via Y type brass strainer

## **GENERAL LAYOUT DRAWING**

Model: HPU-AZ-2-97H

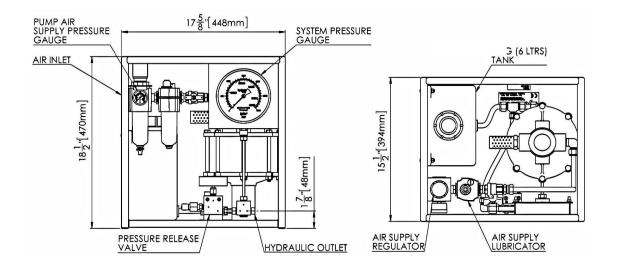



Pag. 3 of 3

# **HYDRAULIC PRESSURE STATIC / STALL CONDITIONS**

AIR PRESSURE	HYDRAULIC PRESSURE
20psi (1.4bar)	1,750psi (121bar)
40psi (2.8bar)	3,700psi (255bar)
60psi (4bar)	5,900psi (407bar)
80psi (5.5bar)	7,700psi (531bar)
100psi (7bar)	9,700psi (669bar)

## **FLOW CURVE**

## HPU-LW-AZ-2-97 - Ratio 97:1

